

TT250 PIATTAFORME DI ACCESSO AD ALTEZZA RIDOTTA







Trade Tower TT250

The Trade Tower TT250 is the perfect choice for tradesmen looking for a quality but lower priced mobile tower.

With folding base unit and extension packs it is ready to order in a range of platform heights up to 7.1m. The Trade Tower TT250 is available in a single width of 780mm and length of 1.65m.

Key Features

- Fully Tig-Welded Joints
- Solid Alloy Construction
- Folding Base Unit
- Extension packs for platform heights up to 7.1m
- Compact dimensions and lightweight make it easier to erect

Certified to EN-1004.

UK Work at Height Directive Compliant. Load Class 3.





Platform Hook



Brace Hook Frame Locking Pin




Stabiliser Attachment



Adjustable Leg and Castor



Trade Tower TT250 Combinations

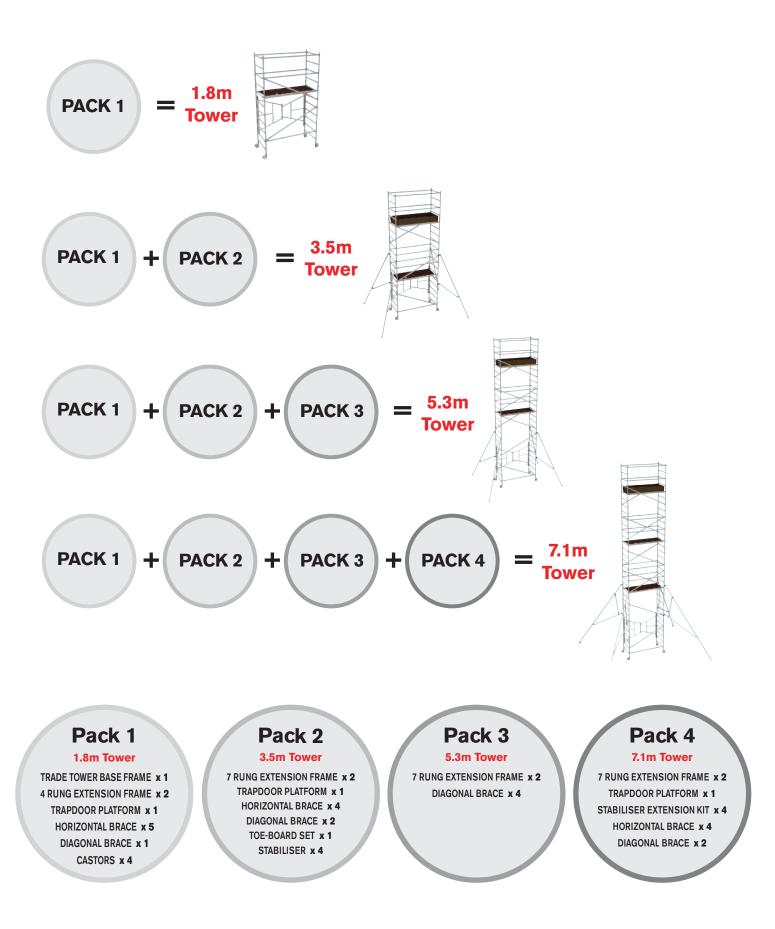



TT250

Key Features



Folding Base Unit



Folding Base Unit



Outrigger Extension Pack

Technical data of Trade Tower TT250 system

Max. Safe platform loading capacity	180kg
Max. Safe tower loading capacity	400kg
Max. Working height, SW tower	9.1m
Length of the tower	1.65m
Single Width only	780mm
Frame heights	1.75m
Transom spacing	250mm
Tubes	Ø40mm
Castors	Ø127mm
Construction aluminium alloy	Welded Aluminium Alloy
Self-locking brace hooks	
Integral ladders	
Two different type of stabilisers	Standard/Extented
EN-1004	Fully Compliant
Work at Height Directive	Fully Compliant
Local assembly manual	Available



CO.MA.CO S.r.l.

via XIV Strada 21 - 20020 Cesate (MI) - Italy Tel. +39 02 99065169 info@comacopro.com <u>www.comacopro.com</u>