

TL37J

TOWABLE BOOM LIFT



- High specification trailer mounted boom lift
- Excellent working envelope including a jib boom
- Hydraulic outriggers for simple set-up
- Proportional controls for easy operation
- Range of power source options

TOWABLE BOOM LIFT

TL37J

DIMENSIONS TL37J

Max. working height	12.9m
Max. platform height	10.9m
Max. working outreach	5.6m
Platform width (C)	1.12m
Platform depth (D)	0.7m
Outrigger footprint (A x B)	3.9m x 3.3m
Towing width (E)	1.61m
Towing length (F)	6.4m
Stowed height (G)	2.1m

PERFORMANCE


Platform capacity (SWL)	215kg
Max. wind speed	12.5m/s
Jib length	1.3m
Jib arc	130°
Platform rotation	160°
Turret rotation (non-continuous)	640°
Tyres	185R14C
Controls	hydraulic proportional

POWER

Power source	24V battery (4 x 6V 225Ah batteries)
Power options	bi-energy (petrol & battery) power or 230V mains

WEIGHT

Weight (battery model)	1,586kg
------------------------	---------

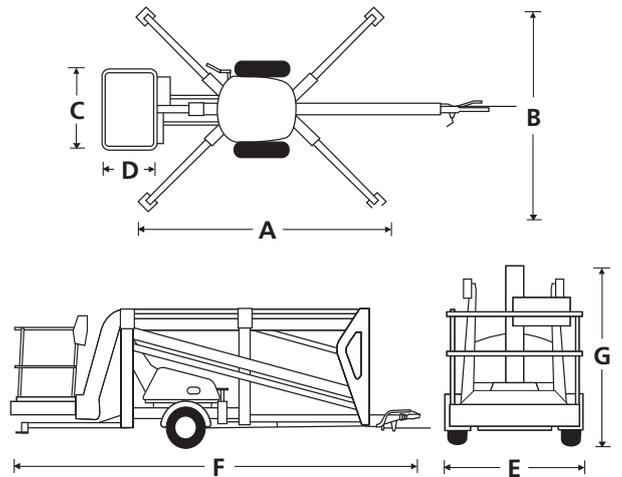


STANDARD FEATURES

- 1.3m jib with 130° working arc
- In-line boom design for maximum rigidity
- Cycle protection guards
- Hand pump emergency lowering from platform
- Power line to platform
- Proportional live hydraulic controls
- Automatic reversing and overrun braking
- Integral road lighting board
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

- Special paint colours
- Friction drive assist package
- Flashing amber light
- Work lights in platform
- Nylon spreader pads (set of 4)

WORKING ENVELOPE

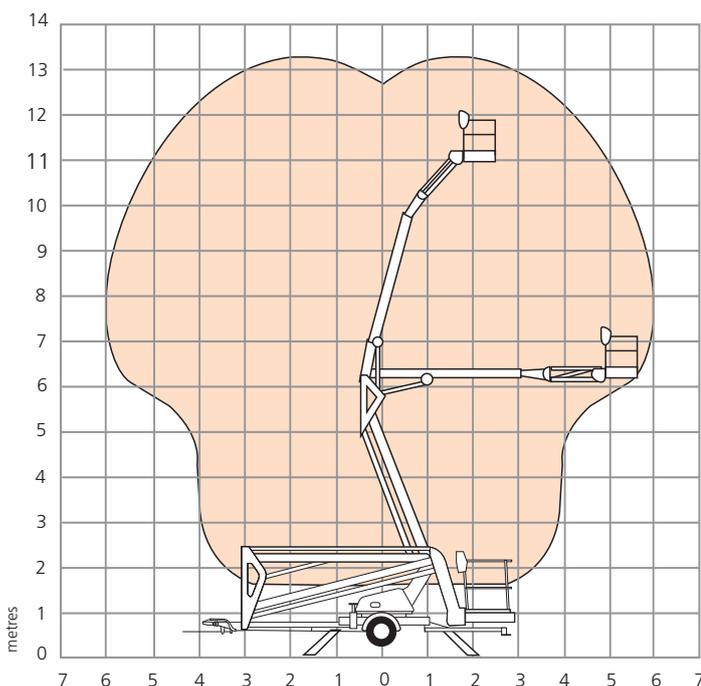

CO.MA.CO S.r.l.

via XIV Strada 21 - 20020 Cesate (MI) - Italy

Tel. +39 02 99065169

info@comacopro.com

www.comacopro.com